



# nordmast


① Dig a hole into the ground according to dimensions below

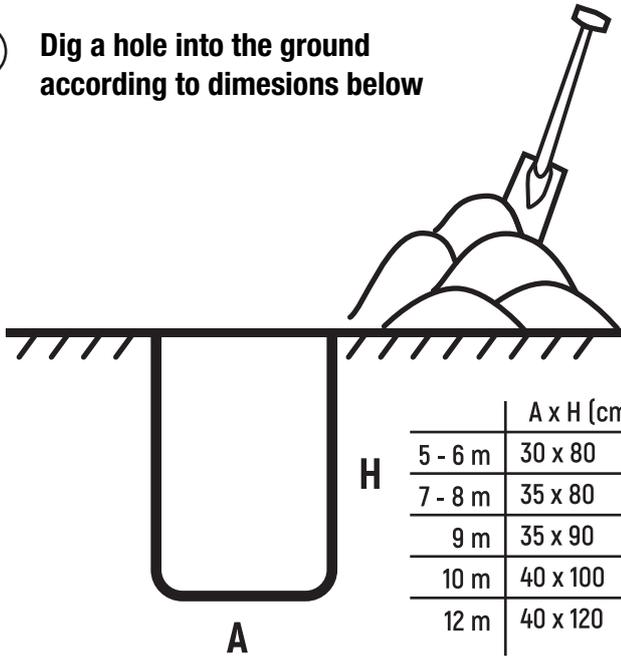

② Attach the anchor rods to the hinge plate

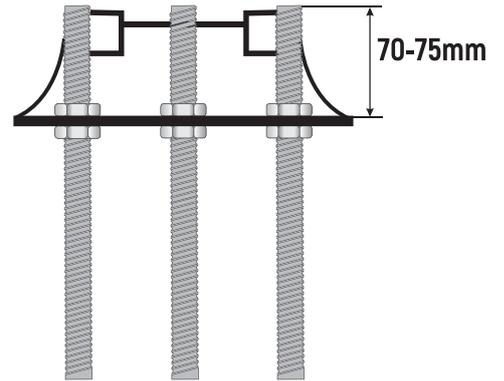


③ Fill the hole with concrete  
Install the ground attachment to the concrete  
Level the ground attachment

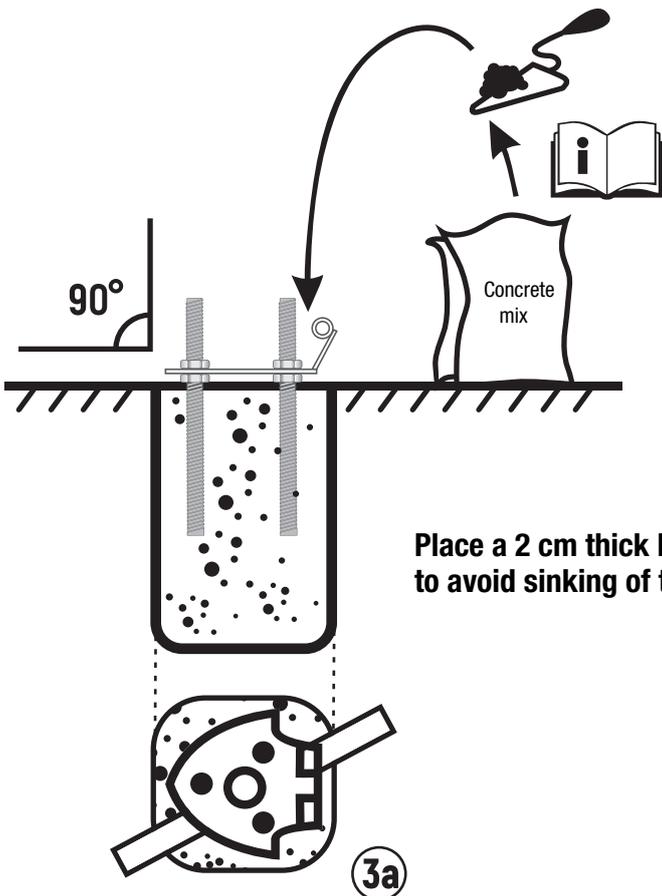


Place a 2 cm thick board under the hinge plate to avoid sinking of the ground attachment

④ Let the concrete to dry

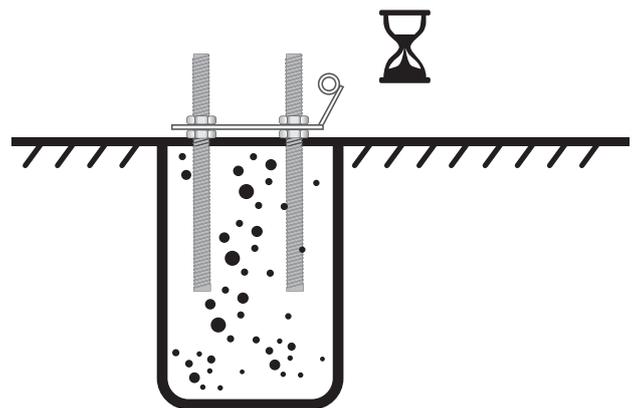


- 5 Attach the flagpole steelbase to the hinge plate and join the hinges with M12 bolt.  
Attach M20 nut and washers in a way, that the washer distance from the top of the rod will remain approximately 45 mm.  
Attach the finial and the rope cleat. Drive the rope through the finial and tie flag hooks to each end of the rope

The ground cover must be attached before finial and cleat, if using one

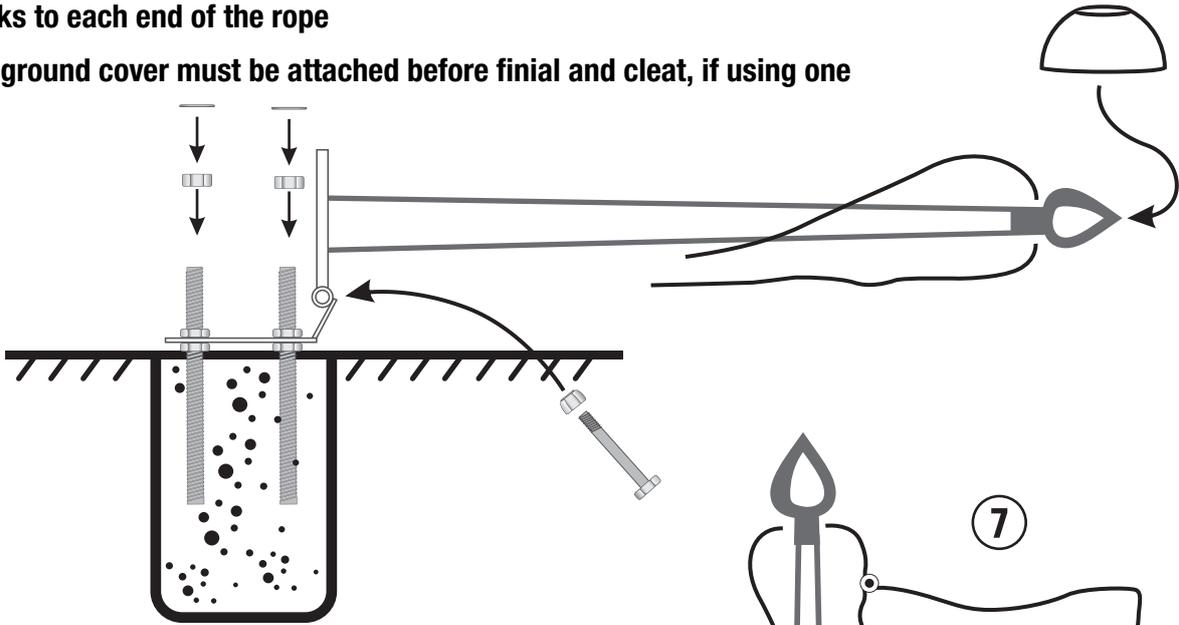

6

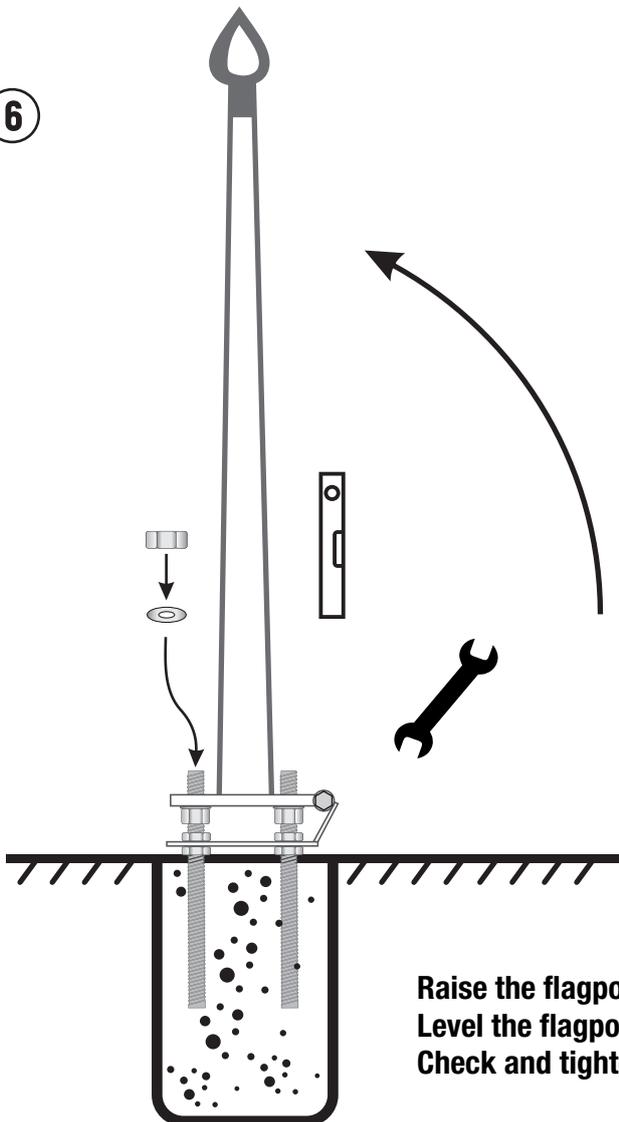

Raise the flagpole, attach M20 washers and nuts.  
Level the flagpole and tighten the nuts.  
Check and tighten the nuts after 2 weeks.

